




14A
SPEED for Ste
PICK-UP

WORKING DIAGRAM



INFO

STANDARD ACCESSORIES

AREA MAX

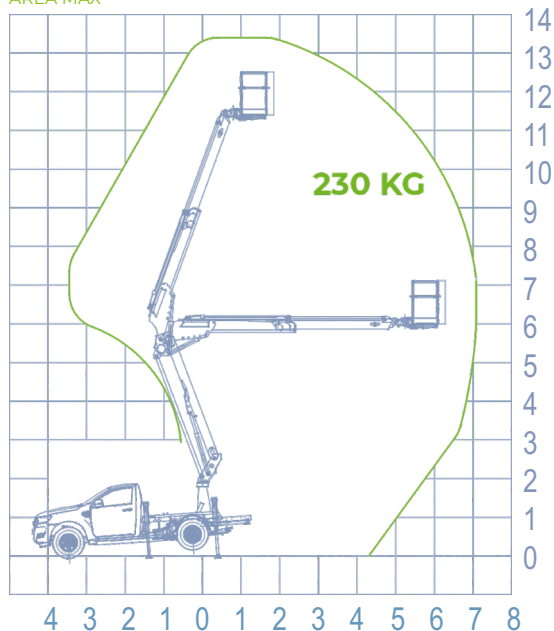

AREA MIN.

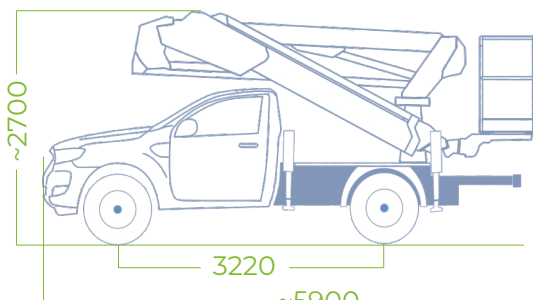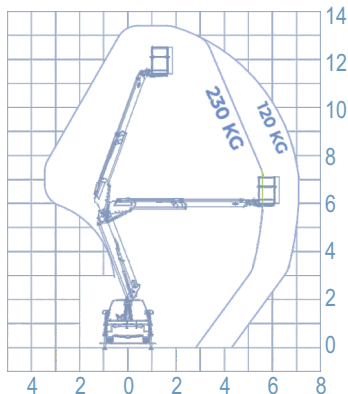

Misure su Ford Ranger

	OUTRIGGERS H+H
	WORKING HEIGHT 13,50 m
	BASKET HEIGHT 11,50 m
	MAX OUTREACH 7,10 m
	BASKET LOAD CAPACITY 230 kg
	BASKET SIZE 1200x700x1100 mm
	BASKET ROTATION 90° + 90°
	CONTROLS Electric
	TURRET ROTATION 700°
	GVW 3,19 ton

DATA SHEET

- Cables and hoses installed inside the boom
- Proportional electrohydraulic controls with regulation of the speed of all movements
- Electronic safe system CAN BUS
- 4 outrigger plates
- Socket 230V and 12V in the basket
- Possibility of simultaneous movements
- Automatic regulation of engine revolutions
- Cataphoresis treatment with powder coating
- Aerial part centering light on the basket

SAFETY DATA

- **Socage Security System**
- Unintentional maneuver protection bar
- Controls protection of the basket
- Circuit breaker with differential protection on the 230V line
- Safety bypass for operator rescue
- Moment limiting device with double security
- Self levelling system for the basket
- Inclinator
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Possibility emergency remote rescue
- Automatic PTO deactivation
- Smart anti crash cab protection
- Electrical hour counter
- Cab light closed outriggers
- Maintenance light (service)

