




15VTJ
for Ste

WORKING DIAGRAM

MAXIMUM AREA

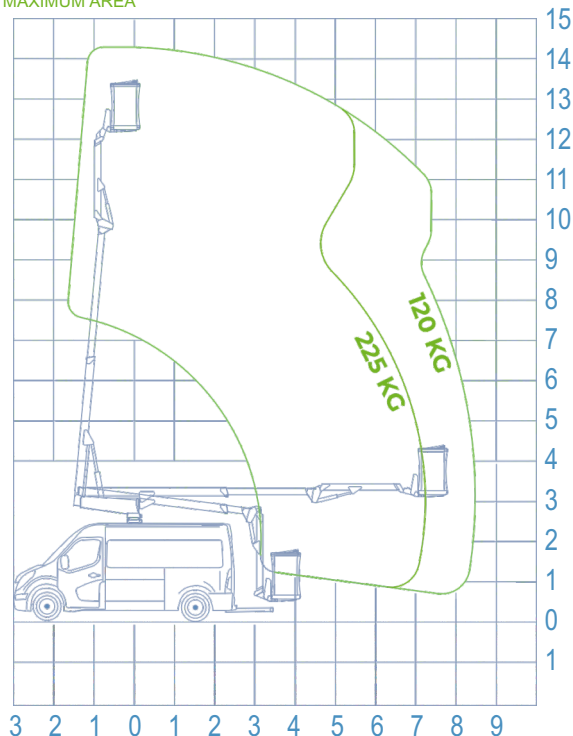

OUTRIGGERS
A



WORKING HEIGHT
14,40 m



BASKET HEIGHT
12,40 m



MAX OUTREACH
8,50 m



BASKET LOAD CAPACITY
225 kg



BASKET SIZE
1400x700x1100 mm



BASKET ROTATION
0°



CONTROLS
Electric



TURRET ROTATION
400°



GVW
3,5 ton




DATA SHEET

- Cables and hoses installed inside the boom
- Articulated jib
- Proportional electro-hydraulic controls with speed regulation of all movements
- Stabilization controls from the basket and from the ground
- Possibility of simultaneous movements
- Engine start/stop from the basket
- 230V and 12V socket in the basket
- CAN BUS electronic management system
- Cataphoresis treatment



SAFETY DATA

- Unintentional maneuver protection bar
- Circuit breaker with differential protection on the 230V line
- Automatic levelling of the basket
- Inclinator
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Electrical hour counter
- 12V emergency electric pump
- Digital hour-counter
- Automatic PTO disengagement

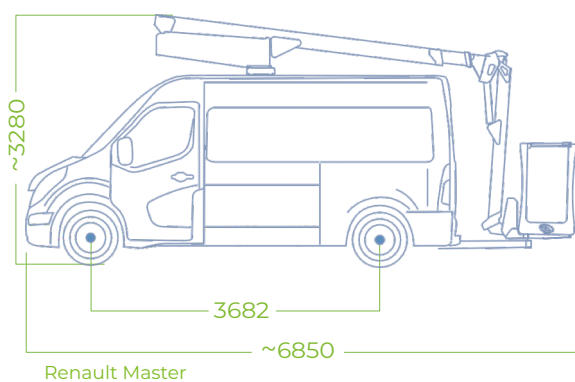

MAXIMUM
AREA

