




16A
SPEED for Ste
PICK-UP

WORKING DIAGRAM

MAXIMUM AREA

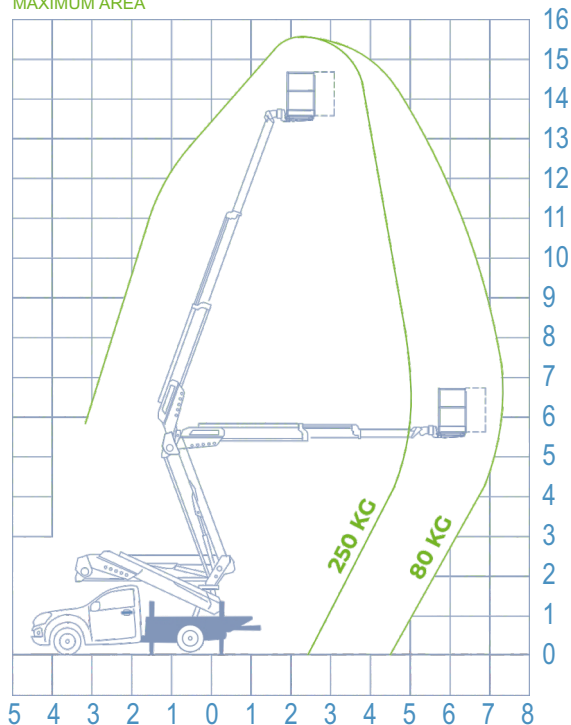

OUTRIGGERS
H+H



WORKING HEIGHT
15,50 m



BASKET HEIGHT
13,50 m



MAX OUTREACH
7,30 m



BASKET LOAD CAPACITY
250 kg



BASKET SIZE
1200x700x1100 mm



BASKET ROTATION
90° + 90°



CONTROLS
Electric



TURRET ROTATION
700°



GVW
3,19 ton

STANDARD ACCESSORIES


DATA SHEET

- Cables and hoses installed inside the boom
- Proportional electrohydraulic controls with regulation of the speed of all movements
- Electronic safe system CAN BUS
- 4 outrigger plates
- Socket 230V and 12V in the basket
- Possibility of simultaneous movements
- Automatic regulation of engine revolutions
- Cataphoresis treatment with powder coating
- Aerial part centering light on the basket

SAFETY DATA

- **Socage Security System**
- Unintentional maneuver protection bar
- Controls protection of the basket
- Circuit braker with differential protection on the 230V line
- Safety bypass for operator rescue
- Moment limiting device with double security
- Self levelling system for the basket
- Inclinator
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Possibility emergency remote rescue
- Automatic PTO deactivation
- Smart anti crash cab protection
- Electrical hour counter
- Cab light closed outriggers
- Maintenance light (service)

MAXIMUM AREA

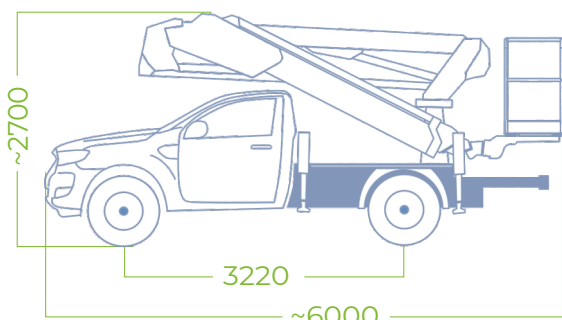

Misure su Ford Ranger

